

1 Lecture 7: More statistics

Data Visualization · 1-DAV-105

Lecture by Broňa Brejová

1.1 Importing libraries and data

As usual, we start by importing libraries. We add `scipy.stats` library for working with probability distributions. At the end of the lecture we add `scikit-learn` library for machine learning in Python.

```
[2]: import numpy as np
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
import plotly.express as px
from IPython.display import Markdown

import scipy.stats
```

```
/tmp/ipykernel_739002/1315221439.py:2: DeprecationWarning:
Pyarrow will become a required dependency of pandas in the next major release of
pandas (pandas 3.0),
(to allow more performant data types, such as the Arrow string type, and better
interoperability with other libraries)
but was not found to be installed on your system.
If this would cause problems for you,
please provide us feedback at https://github.com/pandas-dev/pandas/issues/54466
```

```
import pandas as pd
```

In this lecture, we will use the World bank dataset from Lecture 03 (table `countries`) downloaded from WorldBank <https://databank.worldbank.org/home> under CC BY 4.0 license.

We will also work with an informal survey of preferences and opinions of young people done in 2013 among students of FSEV UK and their friends. The dataset was downloaded from <https://www.kaggle.com/miroslavsabo/young-people-survey>. The columns correspond to survey questions, rows to respondents. The list of questions and the meaning of responses is given in [this document](#).

```
[3]: url = 'https://fmfi-compbio.github.io/viz/data/fsev-responses.csv'
fsev = pd.read_csv(url)
display(Markdown("**Size of fsev table**"), fsev.shape)
```

Size of fsev table:

```
(1010, 150)
```

```
[4]: url = 'https://fmfi-compbio.github.io/viz/data/World_bank.csv'
countries = pd.read_csv(url).set_index('Country')
display(countries.describe())
```

	Population2000	Population2010	Population2020	Area \
count	2.170000e+02	2.170000e+02	2.170000e+02	2.160000e+02
mean	2.821267e+07	3.201312e+07	3.592913e+07	6.235930e+05
std	1.157060e+08	1.282292e+08	1.398323e+08	1.828856e+06
min	9.638000e+03	1.024100e+04	1.106900e+04	1.000000e+01
25%	6.049510e+05	7.055170e+05	7.972020e+05	1.122250e+04
50%	5.056174e+06	5.768613e+06	6.579900e+06	1.017050e+05
75%	1.639406e+07	2.112004e+07	2.564925e+07	4.786050e+05
max	1.262645e+09	1.337705e+09	1.411100e+09	1.709825e+07

	GDP2000	GDP2010	GDP2020	Expectancy2000 \
count	199.000000	209.000000	210.000000	211.000000
mean	8292.850729	16135.528397	17547.135072	67.358588
std	13036.320032	24118.156125	26171.548454	9.795515
min	122.961660	222.660583	216.827417	44.518000
25%	654.638840	1706.414917	2262.246896	61.362000
50%	1996.515578	5735.422857	6370.903532	70.417073
75%	10721.262761	21447.858255	22805.261142	74.505000
max	81763.827669	161780.745361	182537.387370	81.370000

	Expectancy2010	Expectancy2020	Fertility2000	Fertility2010 \
count	210.000000	209.000000	211.000000	211.000000
mean	70.580052	72.309699	3.211021	2.890908
std	8.831970	7.482700	1.716951	1.490287
min	45.596000	52.777000	0.912000	1.042000
25%	64.480750	66.797000	1.840000	1.765000
50%	72.810500	72.889000	2.660000	2.340000
75%	77.578598	78.041000	4.395000	3.827000
max	83.109000	85.497561	7.732000	7.485000

	Fertility2020
count	211.000000
mean	2.525145
std	1.273400
min	0.837000
25%	1.557500
50%	2.040000
75%	3.257000
max	6.892000

```
[5]: display(Markdown("**Values of life expectancy in 2020 in individual countries:
↳**"))
display(countries['Expectancy2020'].dropna())
```

Values of life expectancy in 2020 in individual countries:

Country	
Afghanistan	62.575000

Albania	76.989000
Algeria	74.453000
Angola	62.261000
Antigua and Barbuda	78.841000
...	
Virgin Islands	79.819512
West Bank and Gaza	74.403000
Yemen	64.650000
Zambia	62.380000
Zimbabwe	61.124000

Name: Expectancy2020, Length: 209, dtype: float64


1.2 Histograms


Histograms are well known, and we have seen them in Lecture 03. We split the range of a variable into equally sized bins, count the number of data points in each bin and plot the counts as a bar graph.

Histograms allow us to observe many aspects of the distribution of values of a variable:

- range of values, outliers
- central tendency
- unimodality / multimodality
- variance
- symmetry / skewness (šikmost)


```
[6]: axes = sns.histplot(data=countries, x='Expectancy2020')
axes.set_title('Life expectancy of world countries in 2020')
axes.set_xlabel(None)
axes.figure.set_size_inches(5, 3)
pass
```

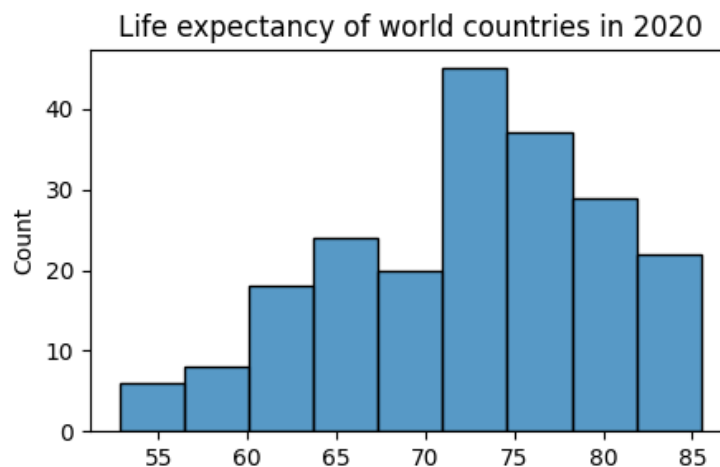

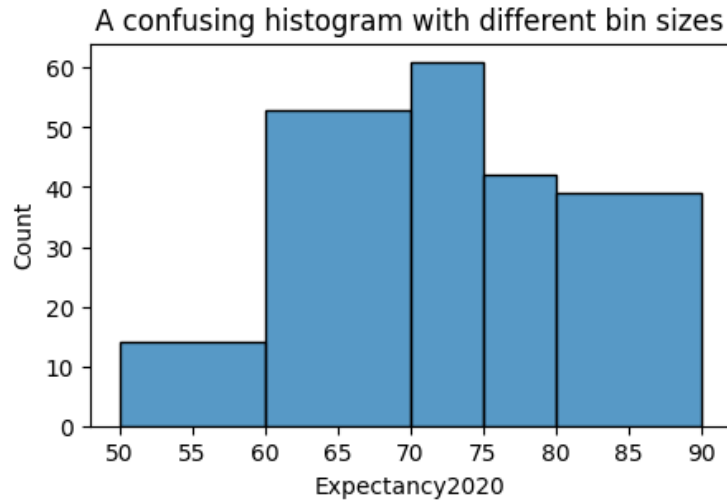

If you really need special bins (e.g. age <18 years, 18-65 years, >65 years), make a categorical variable, then plot it as a bar graph (typically displayed as bars with equal width, spaces between bars), and clearly mark the meaning of each bar.

```
[10]: # split participants into 3 age groups
bin_ends = [0,18,65,150]
bin_labels = ['<18', '18-65', '>65']
age_groups = (pd.cut(fsev['Age'],
                    bins=bin_ends,
                    labels=bin_labels)
              .rename('Age group'))
# count participants in each group
age_counts = age_groups.value_counts()
# bar plot of group sizes
axes = sns.barplot(age_counts)
axes.figure.set_size_inches(5,3)
pass
```

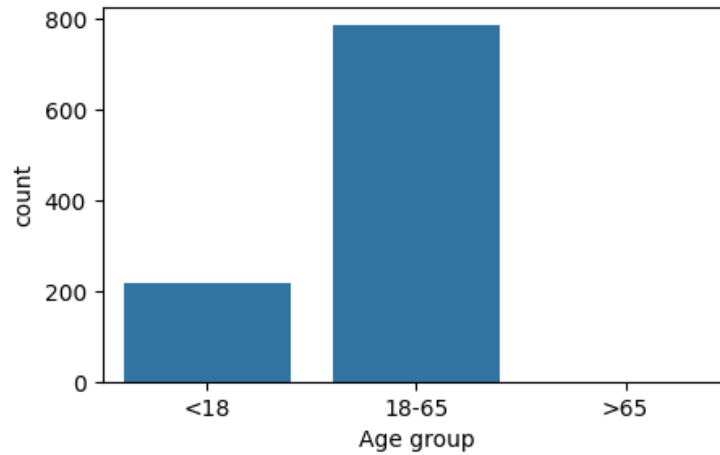


1.2.3 Removing outliers

- Histograms are great for spotting outliers.
- But extreme values reduce the space given to more regular values, so perhaps we want to remove them in subsequent analysis.


We have several options:

- Remove them from the dataset if we believe them to be errors.
- Or remove them from the plot only, e.g. by `set_xlim` or by using custom bins with a smaller range. Warn the reader that some values are not shown.
- Or clip values: replace values above some threshold with the threshold value (function `clip` in Pandas). Thus they will be present in the last bin. This bin should be then clearly marked.

```
[11]: axes = sns.histplot(data=countries, x='GDP2020')
axes.set_title('Some countries have a very high GDP')
axes.set_xticks(np.arange(0, 200000, 50000))
axes.figure.set_size_inches(5, 3)
pass
```

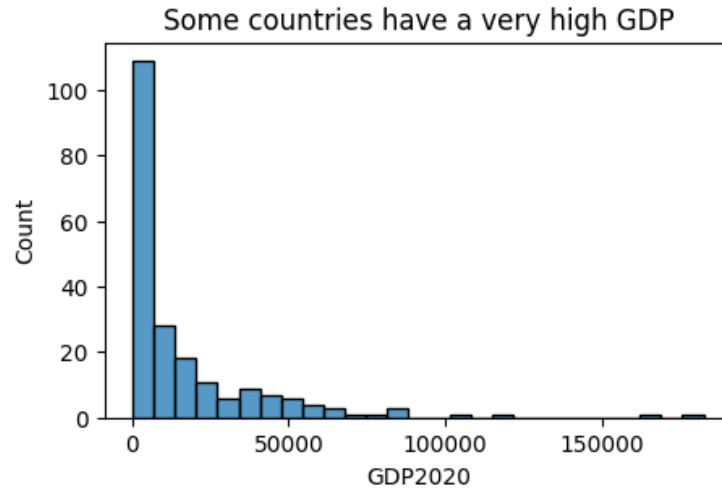

```
[12]: # replace values larger than 51k with 51k
gdp_clipped = countries['GDP2020'].clip(0, 51000)
# make histogram with manual bins, with last bin 50k-52k
axes = sns.histplot(x=gdp_clipped, bins=np.arange(0, 53000, 2000))
axes.figure.set_size_inches(5, 3)
# mention clipping in plot title
axes.set_title('All GDP values >=50k grouped to the last bin')
# also add a text label to the bin with clipped values
axes.text(x=50000, y=25, s='>=50000')
pass
```

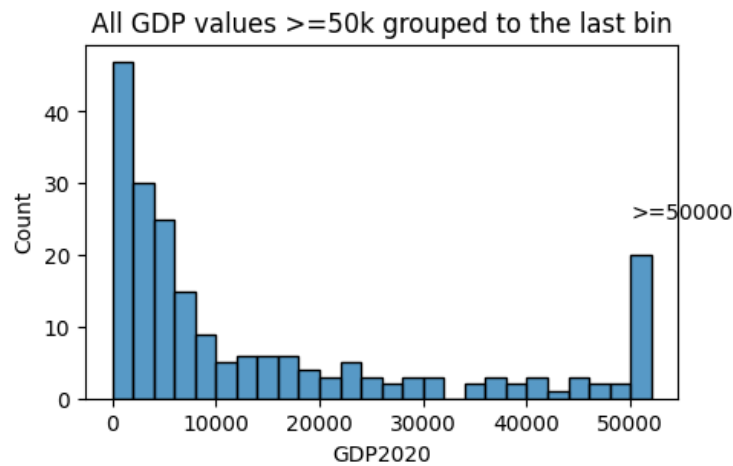

1.2.4 Problems with precision

When working with integers or even real numbers given with a small number of decimal points, we can get artifacts related to different counts of possible values falling to different bins.

To illustrate this, we uniformly sample million points from the set $\{0, 0.01, 0.02, \dots, 0.99\}$.


- There will be a similar number of samples for each possible value from this set.
- We show histograms with 10, 7 and 77 equally sized bins.
- For 10 bins, each bin summarizes 10 of the possible values and the sizes are approximately the same.
- For 7 bins, the first and the last bin summarize 15 possible values each and remaining bins summarize 14 possible values each. The first and last bin are thus slightly higher.
- For 77 bins, some bins summarize 2 different values, others only 1. We see clear differences in bar height.

If we are unaware of this, we may draw incorrect conclusions from the second and third plot.

```
[13]: sample_uniform = np.random.randint(0, 100, 1000000) / 100
display(Markdown('**Example of data (first values):**'), sample_uniform[0:5])
figure, axes = plt.subplots(1, 3, figsize=(10,2.5))
figure.tight_layout(pad=3)
for (i, bin) in enumerate([10, 7, 77]):
    sns.histplot(x=sample_uniform, bins=bin, ax=axes[i])
    axes[i].set_xlabel(f"{bin} bins")
figure.suptitle("Uniform random numbers from [0,1) with 2 decimal digits")
pass
```

Example of data (first values):

```
array([0.14, 0.29, 0.22, 0.3 , 0.88])
```

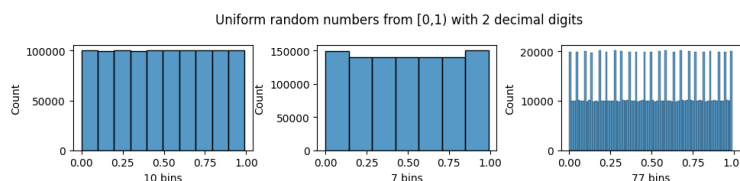


1.2.5 Small samples

Beware drawing strong conclusions from small samples.


- Below we again first show the histogram of life expectancy over all countries.
- Then we show histograms of four random subsets of 20 countries each.
- Any estimates (including histograms) from small samples are subject to random noise.

```
[14]: axes = sns.histplot(data=countries, x='Expectancy2020')
axes.set_title('All countries')
axes.figure.set_size_inches(5, 3)
```

```
pass
```

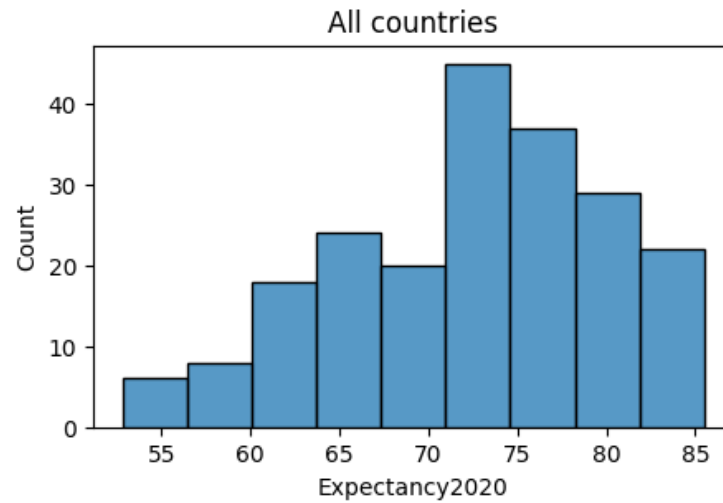

```
[15]: figure, axes = plt.subplots(2, 2, sharex=True, sharey=True, figsize=(7,4))
for row in axes:
    for subplot in row:
        expectancy_sample = countries['Expectancy2020'].dropna().sample(20)
        sns.histplot(x=expectancy_sample, ax=subplot)
figure.suptitle("Different random subsets of 20 countries")
pass
```

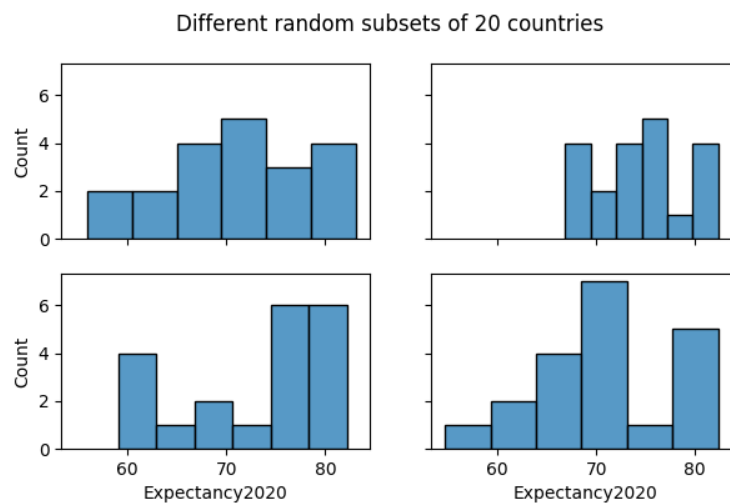

1.2.6 Summary: Histogram bin size

To summarize, the tricky part of using histograms is to choose the bin size or the number of bins.

Smaller bins mean more details are visible, but some of those details may be artefacts:


- random fluctuations due to small number of points in the bin, or
- effects related to insufficient resolution of the data.

Thus choose bin size based on:

- the amount of data,
- the precision of input values,
- the meaningful resolution of the results.

In the example below we show the life expectancy data with different number of bins. Do 50 or 500 bins show more meaningful information than 10 bins?

```
[16]: # one set of plots has share y axis, one has not
figure1, axes1 = plt.subplots(1, 3, figsize=(10,2), sharey=True)
figure2, axes2 = plt.subplots(1, 3, figsize=(10,2))
# plot the same plots for each set
for (figure, axes, title) in [(figure1, axes1, 'shared y axis'),
                             (figure2, axes2, 'different y axes')]:
    # iterate over different numbers of bins
    for (i, bin) in enumerate([10, 50, 500]):
        sns.histplot(data=countries, x='Expectancy2020', bins=bin, ax=axes[i])
        axes[i].set_xlabel(f"{bin} bins")
    # title of the whole figure
    figure.suptitle(f"Life expectancy in 2020, {title}")
    figure.subplots_adjust(wspace=0.3)
pass
```

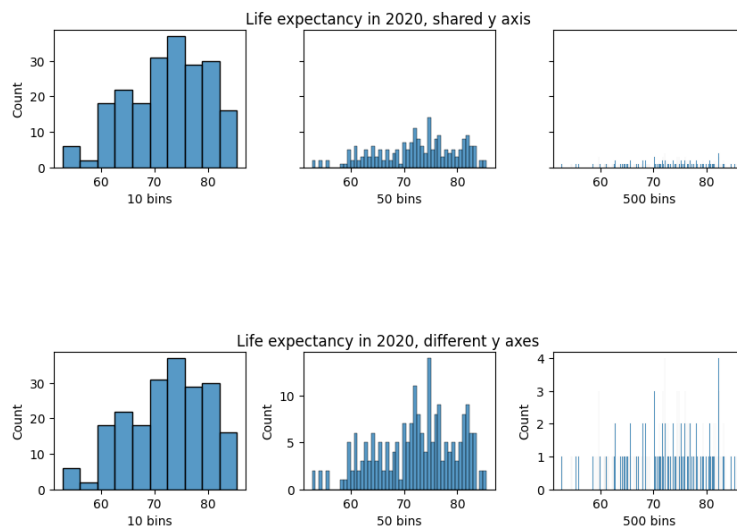


1.2.7 Comparing distributions with histograms

- We can compare distributions of a numerical variable split into groups by a categorical variable.
- For example in our `countries` table, we can compare life expectancy in different regions of the world.
- Seaborn provides [several options](#) for doing so.

The first two plots use semi-transparent overlapping histograms, which work well for two regions (left), but are a mess for many regions (right).

```
[17]: # select two regions
countries_subset = countries.query('Region == "Europe & Central Asia" '
                                   + 'or Region == "Sub-Saharan Africa"')

# create figure with 2 plots
figures, axes = plt.subplots(1, 2, figsize=(10,4), sharey=True)
# plot both histograms
sns.histplot(data=countries_subset, x='Expectancy2020', hue='Region', ax = axes[0])
sns.histplot(data=countries, x='Expectancy2020', hue='Region', ax=axes[1])
# make bigger y-axis to accomodate legend
axes[0].set_ylim(0,40)
# titles
axes[0].set_title('Overlapping histograms for two regions')
axes[1].set_title('Overlapping histograms for all regions')
pass
```

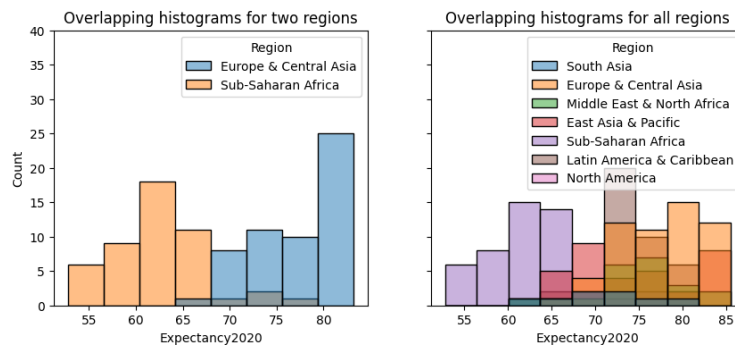

The next two plots attempt to improve the situation.


- On the left we omit bar outlines to simplify the plot.
- On the right we use stacked bars, showing contribution of each region to the whole.

```
[18]: # create figure with 2 plots
figures, axes = plt.subplots(1, 2, figsize=(10, 5))
# plot both histograms
sns.histplot(data=countries, x='Expectancy2020', hue='Region',
```

```

        element='step', ax = axes[0])
sns.histplot(data=countries, x='Expectancy2020', hue='Region', element='step',
            multiple="stack", ax=axes[1])
# make bigger y-axis to accomodate legend
axes[0].set_ylim(0,35)
axes[1].set_ylim(0,80)
# titles
axes[0].set_title('Omitting bar frames')
axes[1].set_title('Stacked bars')
pass

```

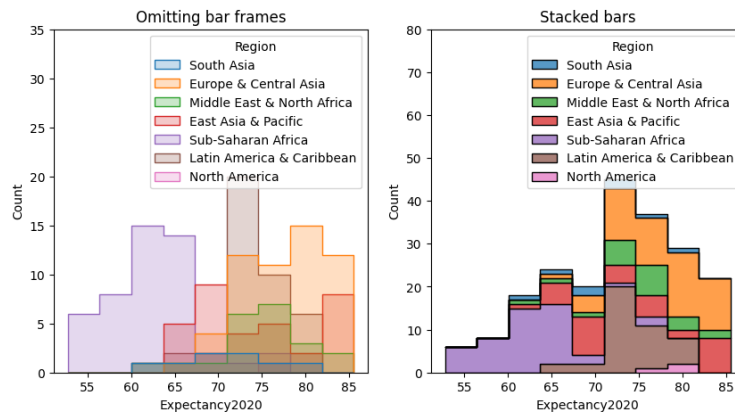

- Regions contain different number of countries.
- To better compare distribution of the expectancy within region, we should normalize the count to probabilities.
- Use `common_norm=False` to normalize each region separately.

```

[19]: display(Markdown("**Countries in regions:**"))
display(countries.groupby('Region').size().sort_values())


# select two regions of very different sizes
countries_subset2 = countries.query('Region == "Europe & Central Asia" '
    + 'or Region == "Middle East & North Africa"')
# plot counts and probabilities
figure, axes = plt.subplots(1, 2, figsize=(9,3))
sns.histplot(data=countries_subset2, x='Expectancy2020', hue='Region',
    element='step', ax=axes[0])
sns.histplot(data=countries_subset2, x='Expectancy2020', hue='Region',
    element='step',
    stat="probability", common_norm=False, ax=axes[1])
axes[0].set_title('Counts')
axes[1].set_title('Probabilities within region')

```

```
pass
```


Countries in regions:

```
Region
North America          3
South Asia             8
Middle East & North Africa 21
East Asia & Pacific    37
Latin America & Caribbean 42
Sub-Saharan Africa    48
Europe & Central Asia  58
dtype: int64
```

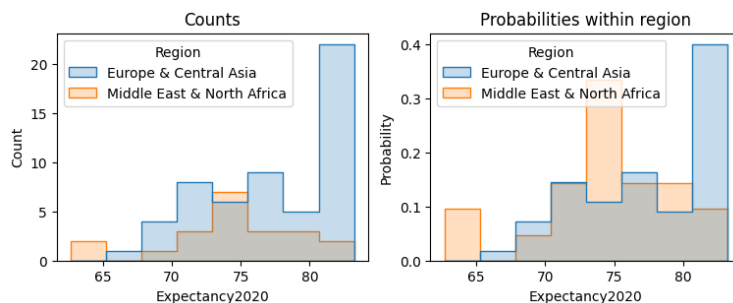


- Using FSEV survey, we can compare self-reported heights of women and men.
- We will use only values of adults above 18 years of age.
- Besides the expected trend, we also see a clear outlier, perhaps an error (although people of such heights exist, the cases are extremely rare).
- We will replace it with NaN.

```
[20]: fsev.iloc[:,144].value_counts()
adults = fsev.query("Age >= 18").copy(deep=True)
axes = sns.histplot(data=adults, x='Height', hue='Gender',
                    hue_order=['female', 'male'], palette=['C3', 'C0'],
                    stat="probability", common_norm=False)
axes.figure.set_size_inches(5, 3)
pass
```

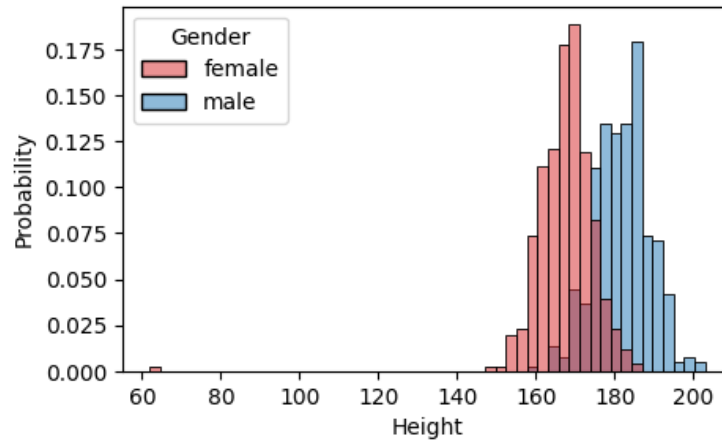

Below we see histograms after removal of the extreme value.

```
[21]: # replace all values lower than 100cm by NaN, in a new column HeightFixed
adults['HeightFixed']=adults['Height'].mask(adults['Height']<100, np.nan)
figure, axes = plt.subplots(1, 3, figsize=(9,4))
sns.histplot(data = adults, x='HeightFixed', hue='Gender',
             hue_order=['female', 'male'], palette=['C3', 'C0'],
             stat="probability", common_norm=False, ax=axes[0])
sns.histplot(data = adults, x='HeightFixed', hue='Gender',
             hue_order=['female', 'male'], palette=['C3', 'C0'],
             ax=axes[1])
sns.histplot(data = adults, x='HeightFixed', ax=axes[2], color='lightgray')
axes[0].set_ylim(0,0.25)
axes[1].set_ylim(0,140)
axes[2].set_ylim(0,140)
axes[0].set_title('Probabilities')
axes[1].set_title('Counts')
axes[2].set_title('Counts combined')
pass
```

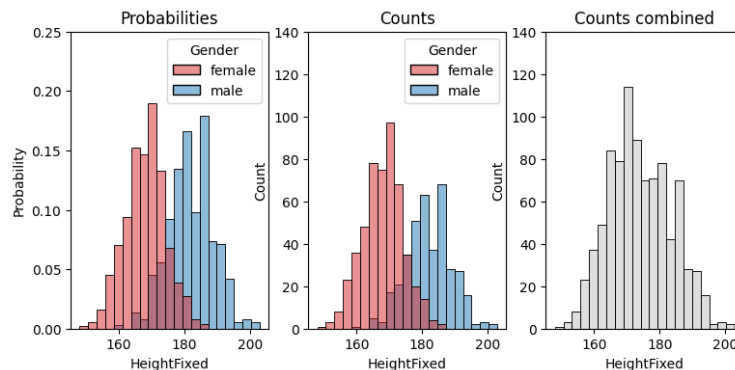

1.3 Probability distributions

- For a continuous variable, we can imagine a histogram of a great number of values with tiny bins, keeping the area under the histogram equal to one.
- In limit we obtain **probability density function** (PDF) (hustota rozdelenia pravdepodobnosti).
- We often assume that our data are a small sample from one of the well-characterized probability distributions (rozdelenie pravdepodobnosti).

1.3.1 Normal (Gaussian) distribution


- The normal (or Gaussian) distribution has two parameters: mean μ and standard deviation σ .
- Its density is $f(x) = \frac{1}{\sigma\sqrt{2\pi}} e^{-\frac{1}{2}\left(\frac{x-\mu}{\sigma}\right)^2}$.
- This is the well-known bell shape.
- Below we plot both histogram of a million samples from this distribution and the density given by the function above.
- These two plots are very similar.

```
[22]: figure, axes = plt.subplots(1, 2, sharex=True,
                                figsize=(8, 3.5), layout="constrained")

# sample million points from the normal distrib. with mean 0 and std. dev. 3
sample_normal = np.random.normal(0, 3, 1000000)
# create histogram of the sampled points
sns.histplot(x=sample_normal, bins=200, ax=axes[0])
axes[0].set_title('Histogram of 1M samples, 200 bins')

# create an object representing normal distrib. with mean 0 and std. dev. 3
normal = scipy.stats.norm(0, 3)
# create equally-spaced points
x = np.arange(-12, 12, 0.1)
# compute values of pdf in these points
y = normal.pdf(x)
# plot the function
axes[1].plot(x, y, 'k-')
axes[1].set_title('Probability density function')
axes[1].set_ylim(0, 0.14)

figure.suptitle("Normal distribution with mean 0, standard dev. 3")
pass
```

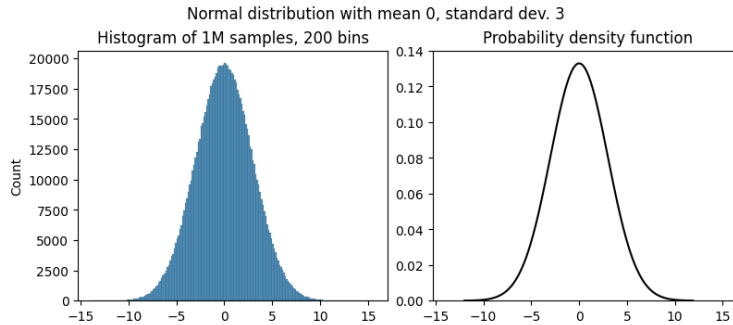

- Normal distribution often arises in situations where a variable is a result of many small influences.
- One example is the height of a person within one gender and population.
- Below we fit the normal distribution to the histogram of the adult male heights from the FSEV survey.

```
[23]: # select male height, drop missing values
male_heights = adults.query("Gender=='male'")['Height'].dropna()
# compute the characteristics (mean, stdev)
display(Markdown(f"Mean male height: {male_heights.mean():.2f}"),
        Markdown(f"Std. dev. male height: {male_heights.std():.2f}"))

# compute the best fit
parameters = scipy.stats.norm.fit(male_heights)
display(Markdown("Best fit:"), parameters)

# get function values for regularly distributed x values
x = np.arange(150, 200, 1)
pdf_fitted = scipy.stats.norm.pdf(x, loc=parameters[0], scale=parameters[1])


# plot histogram, normalized as density (area=1)
figure, axes = plt.subplots(figsize=(5,3))
sns.histplot(x=male_heights, stat='density', ax=axes)
# add a line for fitted density
axes.plot(x, pdf_fitted, 'k-')
axes.set_title('Male heights with normal distribution fit')
pass
```

Mean male height: 181.92

Std. dev. male height: 6.96

Best fit:

(181.91820580474933, 6.948066753375318)

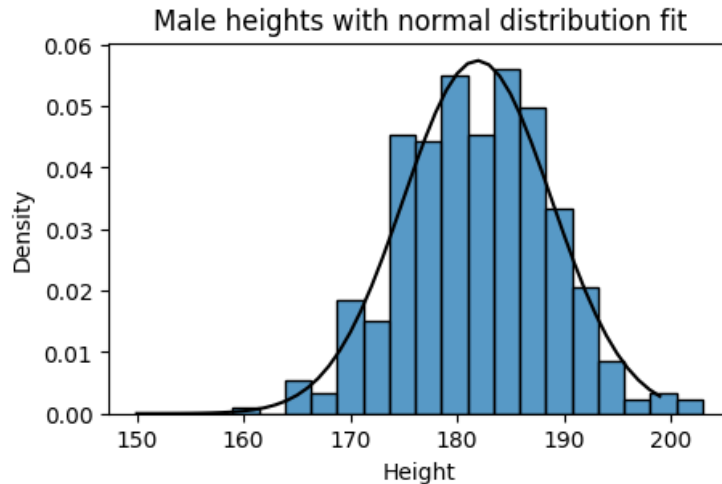

1.4 Kernel density estimation and violin plots


1.4.1 Kernel Density Estimation (KDE, jadrové odhady hustoty)

- KDE is a smoothed version of a histogram.
- We choose a kernel function, e.g. the normal distribution.
- For each point in the dataset, the method creates a “kernel” centered at that point.
- It then adds up the heights of all kernel copies.
- The amount of smoothing is controlled by the bandwidth parameter (standard deviation for the normal distribution).
- More information is in [the scikit-learn documentation](#).

https://commons.wikimedia.org/wiki/File:Comparison_of_1D_histogram_and_KDE.png Drleft at English Wikipedia, CC BY-SA 3.0


- KDE can be conveniently computed directly [in Seaborn’s displot/kdeplot functions](#).
- The bandwidth is adjusted by `bw_adjust`, with default 1.
- A small bandwidth leads to a bumpy plot not representing real trends.
- A large bandwidth can obscure real trends.

```
[24]: figure, axes = plt.subplots(1, 3, sharex=True, sharey=True, figsize=(9,2.5))
for axes, bandwidth in [(axes[0], 0.25), (axes[1], 1), (axes[2], 4)]:
    sns.kdeplot(x=countries["Expectancy2020"], ax=axes, bw_adjust=bandwidth)
    axes.set_title(f'Bandwidth {bandwidth}')
    axes.set_xlim(40,100)
pass
```

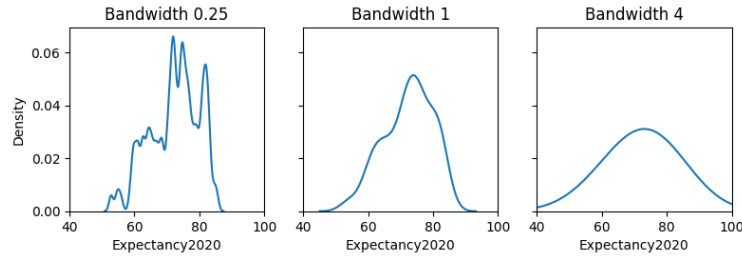


We can display combined histogram and KDE.

```
[25]: axes = sns.displot(countries, x="Expectancy2020", kde=True)
axes.figure.set_size_inches(5, 3)
pass
```

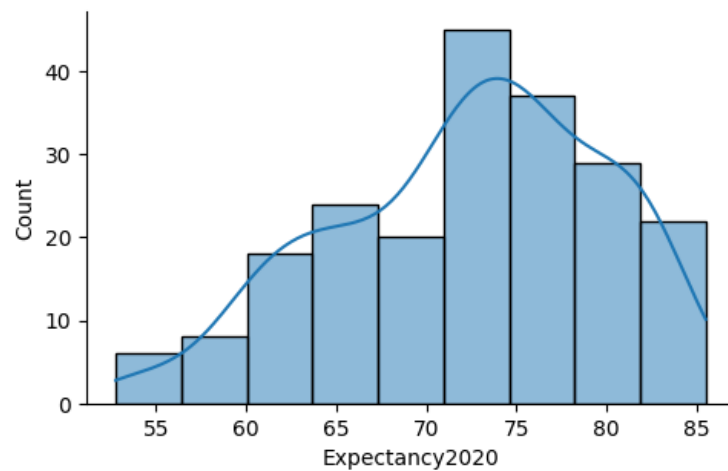

KDE plots can be also better for comparing multiple distributions, as their smooth curves are easier to follow than histograms.


```
[26]: figure, axes = plt.subplots(1, 2, sharex=True, figsize=(9,5))
sns.kdeplot(x=countries["Expectancy2020"], hue=countries["Region"], ax=axes[0])
axes[0].set_ylim(0, 0.05)
axes[0].set_title('Common normalization')
sns.kdeplot(x=countries["Expectancy2020"], hue=countries["Region"],
            common_norm=False, ax=axes[1])
axes[1].set_title('Separate normalization')
axes[1].set_ylim(0, 0.35)
pass
```

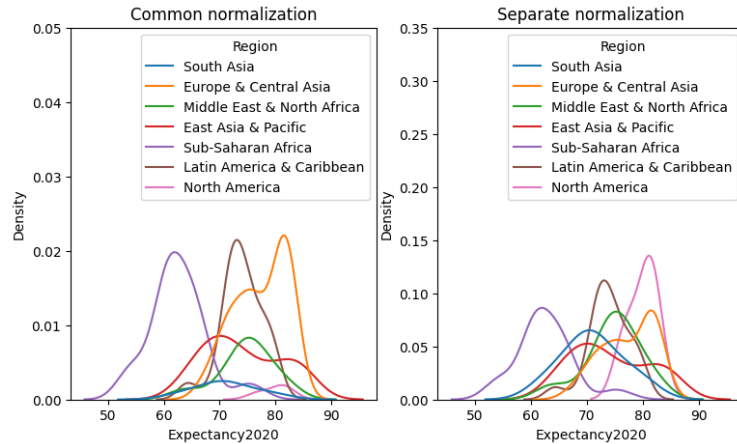

1.4.2 Violin plots (huslové grafy)

- [Violin plots](#) are often used instead of boxplots to compare distributions for different values of a categorical variable.
- Each violin consist of two symmetric KDE plots.
- They can be accompanied by a boxplot or strip plot.
- More variants can be found in the [Seaborn tutorial](#).

```
[27]: sns.violinplot(data=countries, y="Region", x="Expectancy2020",
↳ color="lightgrey")
pass
```

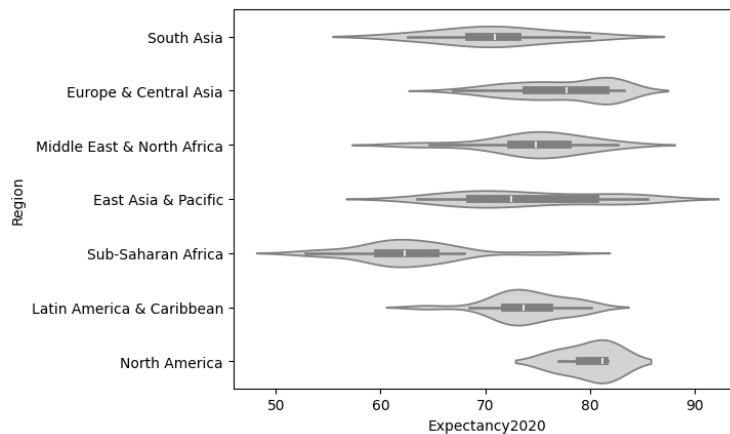


1.4.3 Two-dimensional histograms / KDE


- Instead of scatterplots, we can compute 2D histograms shown as a heatmap or smooth them by KDE.

- This works well if we have many overlapping points.
- Below we show several variants for the plot height vs. weight of adults in the FSEV survey (with the height outlier removed).
- In scatterplot there is a cloud of overlapping points and it is not clear which parts of it are denser. This can be somewhat improved with smaller points and transparency.


```
[28]: axes = sns.scatterplot(data=adults, x='HeightFixed', y='Weight')
axes.figure.set_size_inches(5, 3)
axes.set_title('Scatterplot of height vs weight')
pass
```

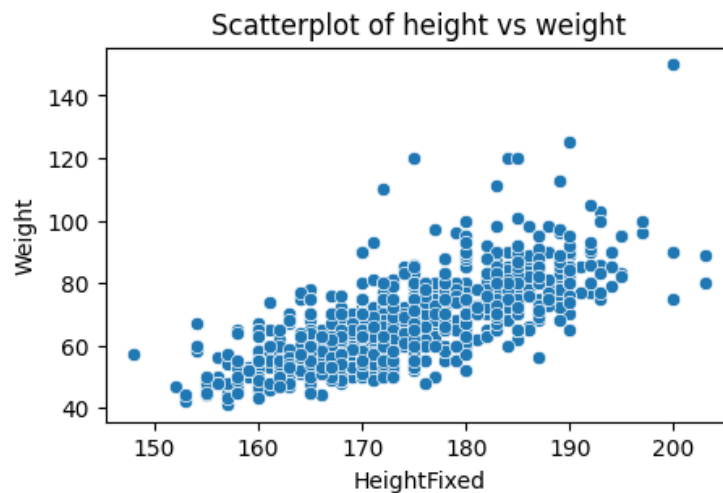


```
[29]: # plot with smaller points (s=4) and transparency (alpha=0.6)
axes = sns.scatterplot(data=adults, x='HeightFixed', y='Weight', s=4, alpha=0.6)
axes.figure.set_size_inches(5, 3)
axes.set_title('Scatterplot of height vs weight with transparency')
pass
```

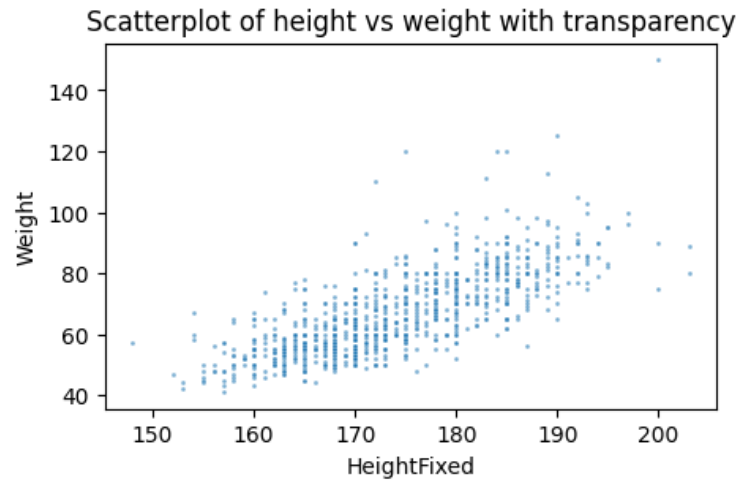


```
[30]: grid = sns.displot(data=adults, x='HeightFixed', y='Weight')
grid.figure.set_size_inches(4, 3)
grid.ax.set_title('Heatmap (2D histogram) of height vs weight')
pass
```

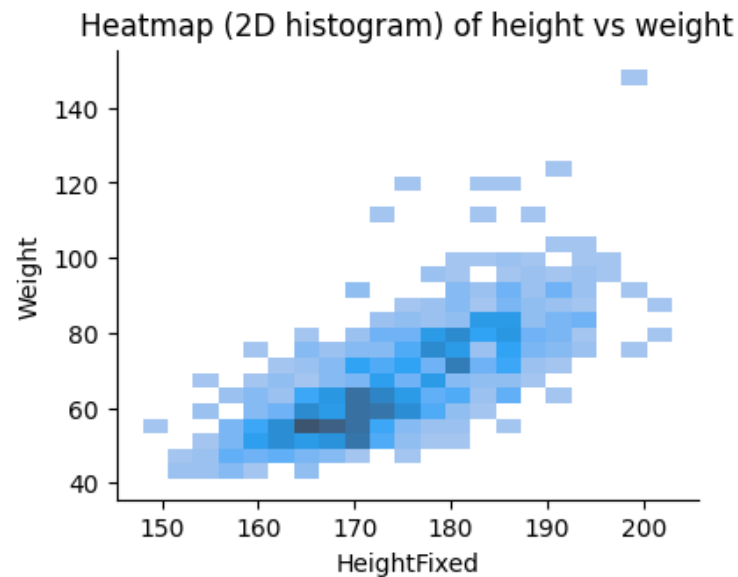

```
[31]: grid = sns.displot(data=adults, x='HeightFixed', y='Weight', kind="kde")
grid.figure.set_size_inches(4, 3)
grid.ax.set_title('2D KDE of height vs weight: isolines')
pass
```

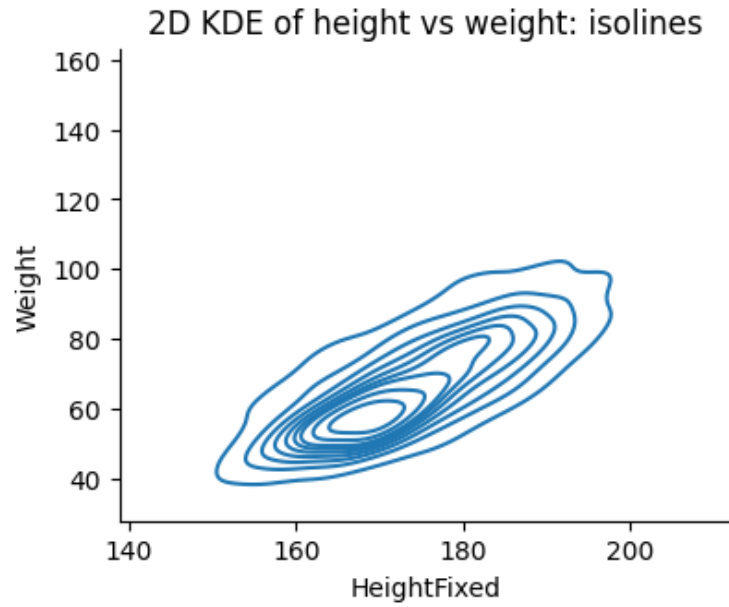

```
[32]: grid = sns.displot(data=adults, x='HeightFixed', y='Weight', kind="kde",  
    fill=True)  
grid.figure.set_size_inches(4, 3)  
grid.ax.set_title('2D KDE of height vs weight: color scale')  
pass
```

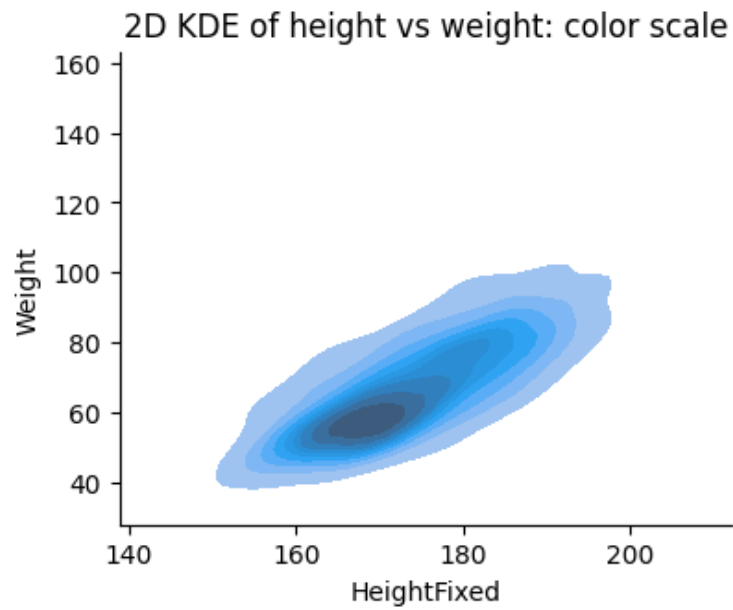


1.5 Cumulative distribution function

For a probability density function $f(x)$:

- Its cumulative distribution function (CDF) (distribučná funkcia) is the area under the curve from left up to point x .
- $F(x) = \int_{-\infty}^x f(t) dt$.
- CDF is non-decreasing.
- $\lim_{x \rightarrow -\infty} F(x) = 0$ and $\lim_{x \rightarrow \infty} F(x) = 1$.
- $F(x)$ is the probability that the random point from the distribution is $\leq x$.

```
[33]: (figure, axes) = plt.subplots(1, 2, figsize=(10, 4), sharex=True)

normal = scipy.stats.norm(0, 1)
# create equally-spaced points
width = 4
x = np.arange(-width, width, 0.02)
chosen_x = -1.1
x2 = np.arange(-width, chosen_x, 0.02)
# compute values of pdf in these points
y_density = normal.pdf(x)
y_cdf = normal.cdf(x)
chosen_y = normal.cdf(chosen_x)
# plot the function
axes[0].plot(x, y_density, 'k-')
axes[0].fill_between(x2, y_density[0:len(x2)], 0, alpha=0.4, color='red')
axes[0].text(x=chosen_x-1, y=0.02, s=f'{chosen_y:.2f}', color='red')
axes[0].set_title('Probability density function')
axes[0].set_ylim(0, 0.42)
axes[0].set_xlim(-width, width)
axes[0].set_xticks([-4, chosen_x, 0, 4])
axes[0].set_yticks([0, 0.1, 0.2, 0.3, 0.4])
axes[1].plot(x, y_cdf, 'k-')
axes[1].plot([chosen_x, chosen_x, -width], [0, chosen_y, chosen_y], 'r-')
axes[1].set_title('Cumulative distribution function')
axes[1].set_ylim(0, 1)
axes[1].set_yticks([0, chosen_y, 0.5, 1])
axes[1].yaxis.set_major_formatter('{x:.2f}')
pass
```

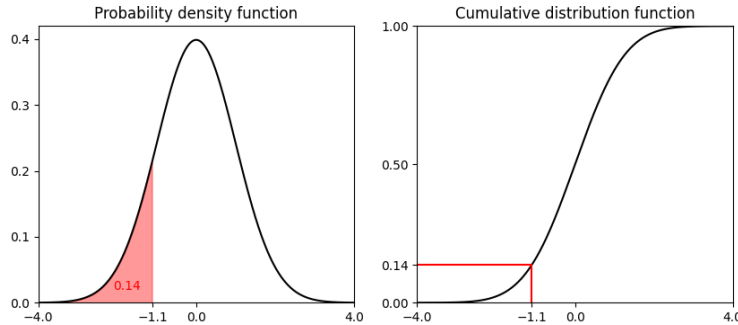


```
[51]: (figure, axes) = plt.subplots(2, 2, figsize=(10, 6), sharex=True)
```

```
normal01 = scipy.stats.norm(0, 1)
normal02 = scipy.stats.norm(0, 2)
normal11 = scipy.stats.norm(1, 1)
# create equally-spaced points
width = 4
x = np.arange(-width, width, 0.02)
d01 = normal01.pdf(x)
d02 = normal02.pdf(x)
d11 = normal11.pdf(x)

y01 = normal01.cdf(x)
y02 = normal02.cdf(x)
y11 = normal11.cdf(x)
axes[0, 0].plot(x, d01, 'k-', label='mean=0, stdev=1')
axes[0, 0].plot(x, d02, 'r-', label='mean=0, stdev=2')
axes[1, 0].plot(x, d01, 'k-', label='mean=0, stdev=1')
axes[1, 0].plot(x, d11, 'b-', label='mean=1, stdev=1')



axes[0, 1].plot(x, y01, 'k-', label='mean=0, stdev=1')
axes[0, 1].plot(x, y02, 'r-', label='mean=0, stdev=2')
axes[1, 1].plot(x, y01, 'k-', label='mean=0, stdev=1')
axes[1, 1].plot(x, y11, 'b-', label='mean=1, stdev=1')
axes[1, 1].legend()
axes[0, 1].legend()
axes[0, 0].set_title('Probability density functions')
axes[0, 1].set_title('Cumulative distribution functions')
pass
```

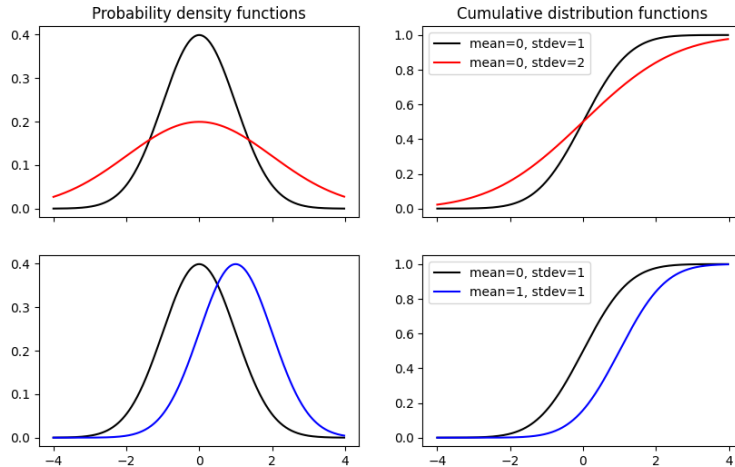

1.5.1 Empirical cumulative distribution function (ECDF)

- This is a similar concept for a finite sample.
- For each x , $F(x)$ is the fraction of the sample which is $\leq x$.
- This gives us a step-wise function which can be visualized.
- Unlike histograms and KDE, no parameters need to be set (bins, bandwidth).
- Allows comparison of multiple distributions and their quantiles (how?).
- But harder to interpret than histogram in terms of shape.

```
[35]: grid = sns.displot(adults, x="HeightFixed", hue="Gender", kind="ecdf",
                        hue_order=['female', 'male'], palette=['C3', 'C0'])
grid.axes[0,0].set_title('ECDF for female and male heights')
grid = sns.displot(countries, x="Expectancy2020", hue="Region", kind="ecdf")
grid.axes[0,0].set_title('ECDF for expectancy in different regions')
grid.figure.set_size_inches(5, 3)
pass
```

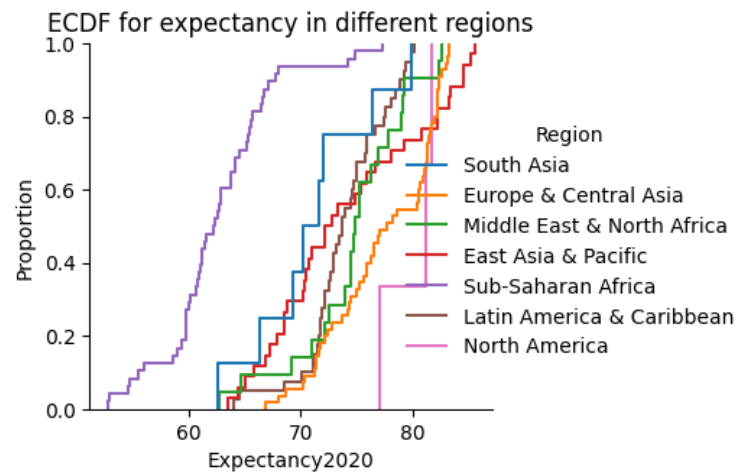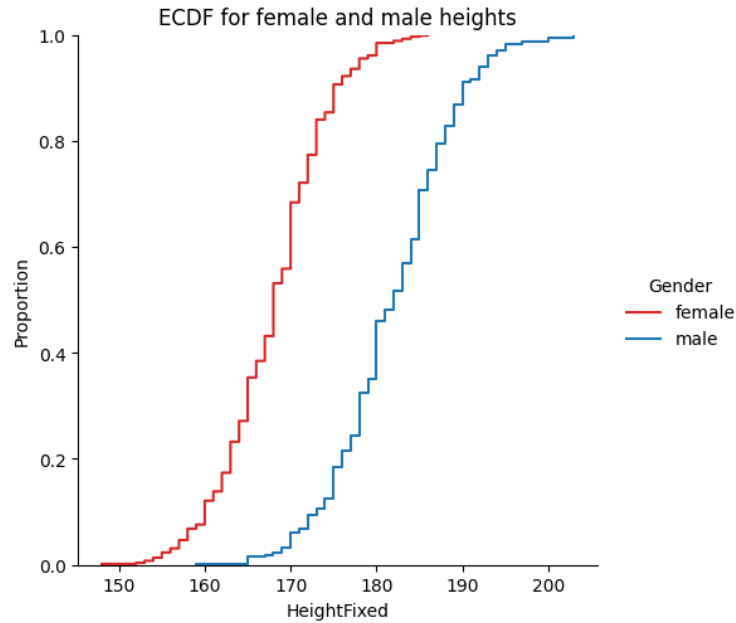

1.6 Multi-dimensional data: Clustering and dimensionality reduction

1.6.1 Dataset


- The FSEV survey contains questions about phobias and fears, each with answers 1-5 (5 means highest fear).
- We will first randomly select 200 participants without missing values.
- We will display them as a heatmap.

```
[36]: # columns 63-72 are fears, drop rows with missing values, sample 200 people
fsev_sample = fsev.iloc[:, 63:73].dropna().sample(200)
# show sample of the data
display(fsev_sample.head())
```

	Flying	Storm	Darkness	Heights	Spiders	Snakes	Rats	Ageing \
112	2.0	4.0	3.0	1.0	4.0	4	1.0	2.0
736	2.0	2.0	4.0	3.0	3.0	2	1.0	4.0
560	4.0	5.0	5.0	5.0	1.0	5	5.0	5.0
796	5.0	3.0	4.0	5.0	5.0	5	3.0	4.0
340	1.0	4.0	4.0	4.0	5.0	4	1.0	3.0

	Dangerous dogs	Fear of public speaking
112	3.0	3.0
736	1.0	2.0
560	5.0	4.0
796	3.0	4.0
340	5.0	1.0

```
[37]: figure, axes = plt.subplots(figsize=(10,6))
sns.heatmap(fsev_sample.transpose(), xticklabels=False, ax=axes, cmap="YlOrBr")
pass
```

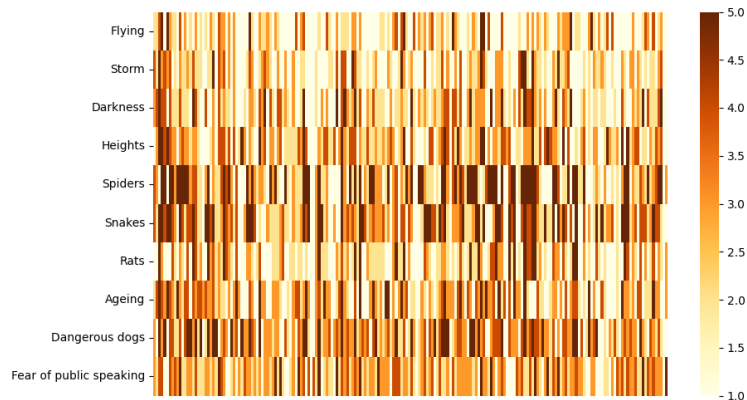

- Heatmap does not show clear trends, but we see that some phobias have higher values than others.
- We display this more explicitly by sorted means.
- Then we “standardize” values for individual phobias by subtracting the mean and dividing by the standard deviation.
- After this change, each phobia has mean 0 and standard deviation 1.
- People with positive scores fear that subject more than average, with negative scores less than average.

```
[38]: display(Markdown("**Phobias sorted by mean score in the survey:**"))
display(fsev_sample.mean().sort_values())
```

Phobias sorted by mean score in the survey:


```
Flying          1.975
Storm           2.060
Rats            2.280
Darkness        2.380
Heights         2.625
Ageing          2.630
Fear of public speaking  2.755
Spiders         3.020
Dangerous dogs  3.055
Snakes          3.090
dtype: float64
```

```
[39]: fsev_sample_standardized = (fsev_sample - fsev_sample.mean()) / fsev_sample.
      ↪std()
display(fsev_sample_standardized.head())
```

```
      Flying      Storm  Darkness  Heights  Spiders  Snakes  Rats \
112  0.021043  1.643497  0.479201 -1.252675  0.612212  0.621684 -0.961984
736  0.021043 -0.050830  1.252106  0.289079 -0.012494 -0.744654 -0.961984
560  1.704492  2.490661  2.025011  1.830833 -1.261906  1.304853  2.044216
796  2.546217  0.796334  1.252106  1.830833  1.236917  1.304853  0.541116
340 -0.820681  1.643497  1.252106  1.059956  1.236917  0.621684 -0.961984

      Ageing  Dangerous dogs  Fear of public speaking
112 -0.464151      -0.040314              0.212312
736  1.009344      -1.506280             -0.654266
560  1.746091       1.425652              1.078890
796  1.009344      -0.040314              1.078890
340  0.272596       1.425652             -1.520845
```

```
[40]: figure, axes = plt.subplots(figsize=(10,6))
sns.heatmap(fsev_sample_standardized.transpose(), xticklabels=False,
      ↪cmap="YlOrBr")
pass
```

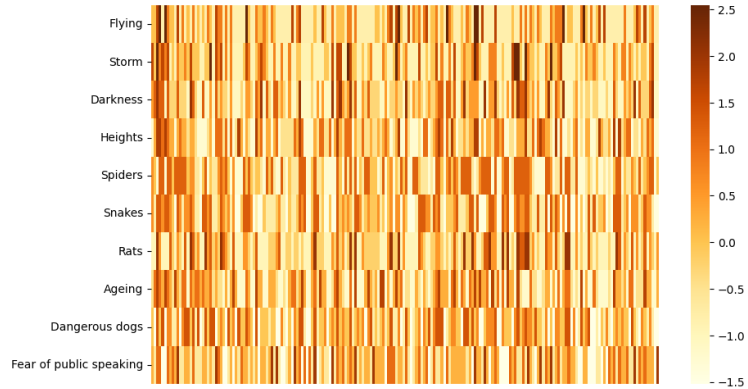


- Heatmap above does not show much.
- Below we rearrange it by clustering.

1.6.2 Clustering (zhlukovanie)

- Clustering means finding groups of similar data points.
- Here we apply it to both people and phobias.
- There are many different kinds of clustering, the one used here is [hierarchical clustering](#), which creates a hierarchy of smaller groups inside larger groups.
- The rows and columns of the matrix were rearranged according to the cluster hierarchy. This puts similar rows and similar columns together. Some areas of dark and light colors appear as a result, highlighting some repeated patterns.

```
[41]: sns.clustermap(fsev_sample_standardized.transpose(),
                    xticklabels=False, figsize=(10,6), cmap="YlOrBr")
pass
```

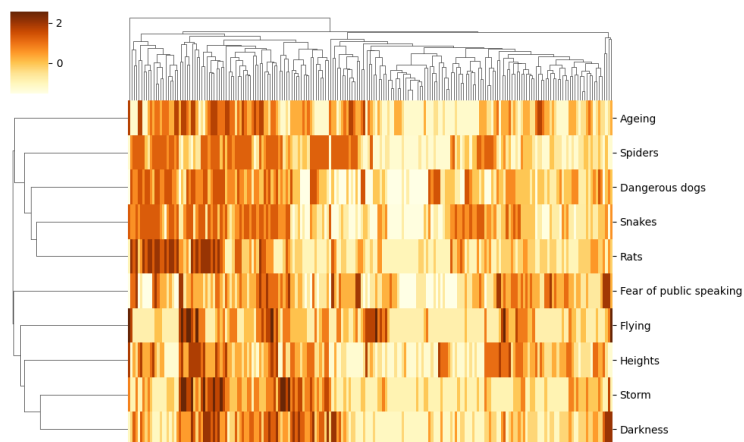

1.6.3 Dimensionality reduction

Methods for dimensionality reduction project high-dimensional data into lower-dimensional (usually 2D) space, while trying to preserve some structure in the original data.

- **Principal component analysis** (PCA) uses a linear projection: each new dimension is a linear combination (weighted sum) of the original dimensions. Weights are chosen to maximize variance.


Some methods do not use linear projections, but try to preserve distances between points, for example: * [Multidimensional scaling](#) (MDS), * [T-distributed Stochastic Neighbor Embedding](#) (t-SNE).

We will use PCA from the [scikit-learn library](#) for machine learning in Python.

```
[42]: from sklearn.decomposition import PCA
      # compute PCA of our standardized data with 2 dimensions
      fsev_pca = PCA(n_components=2).fit_transform(fsev_sample_standardized)
      display(Markdown("**PCA transformed values** (first five lines):"))
      display(fsev_pca[0:5, :])
      axes = sns.scatterplot(x=fsev_pca[:, 0], y=fsev_pca[:, 1])
```

PCA transformed values (first five lines):


```
array([[ 0.42614032,  0.15100199],
       [-0.49219475,  1.2289362 ],
       [ 4.55189844,  1.77057068],
       [ 3.38202659,  1.72947717],
       [ 1.68718897, -0.22614794]])
```

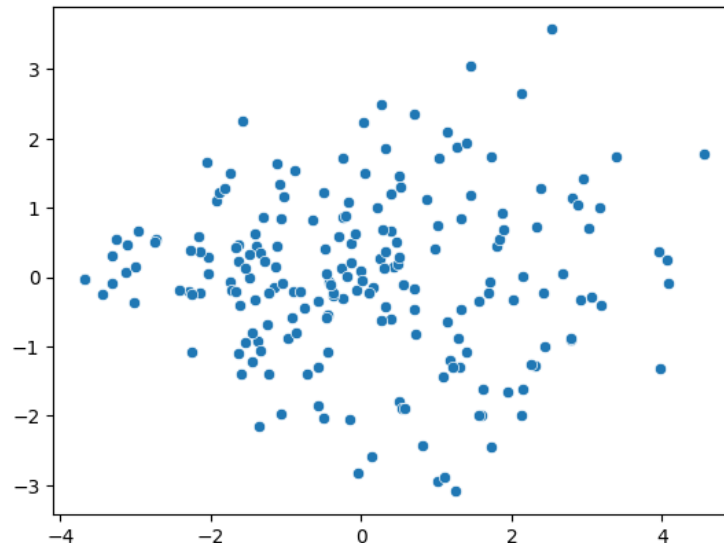

The scatterplot starts to be interesting if we can color points by some known factors.

- Below we see that men and women are quite mixed but women are shifted to the left.
- It seems that the first dimension strongly correlates with the overall fearfulness of a person.
- Fears of snakes and storms are strongly related to the overall fearfulness, but they also have trends along the y-axis.

```
[43]: # all columns for our sample to select gender and all data
fsev_sample_all = fsev.loc[fsev_sample.index,]
figure, axes = plt.subplots(2, 2, figsize=(10,10))
sns.scatterplot(x=fsev_pca[:, 0], y=fsev_pca[:, 1],
               hue=fsev_sample_all['Gender'],
               hue_order=['female', 'male'], palette=['C3', 'C0'],
               ax=axes[0,0])
axes[0,0].set_title('PCA colored by gender')
sns.scatterplot(x=fsev_pca[:, 0], y=fsev_pca[:, 1],
               hue=fsev_sample_all.sum(axis=1), ax=axes[0,1])
axes[0,1].set_title('PCA colored by sum of fears')
sns.scatterplot(x=fsev_pca[:, 0], y=fsev_pca[:, 1],
               hue=fsev_sample_all['Snakes'], ax=axes[1,0])
axes[1,0].set_title('PCA colored by fear of snakes')
sns.scatterplot(x=fsev_pca[:, 0], y=fsev_pca[:, 1],
               hue=fsev_sample_all['Storm'], ax=axes[1,1])
axes[1,1].set_title('PCA colored by fear of storm')
pass
```

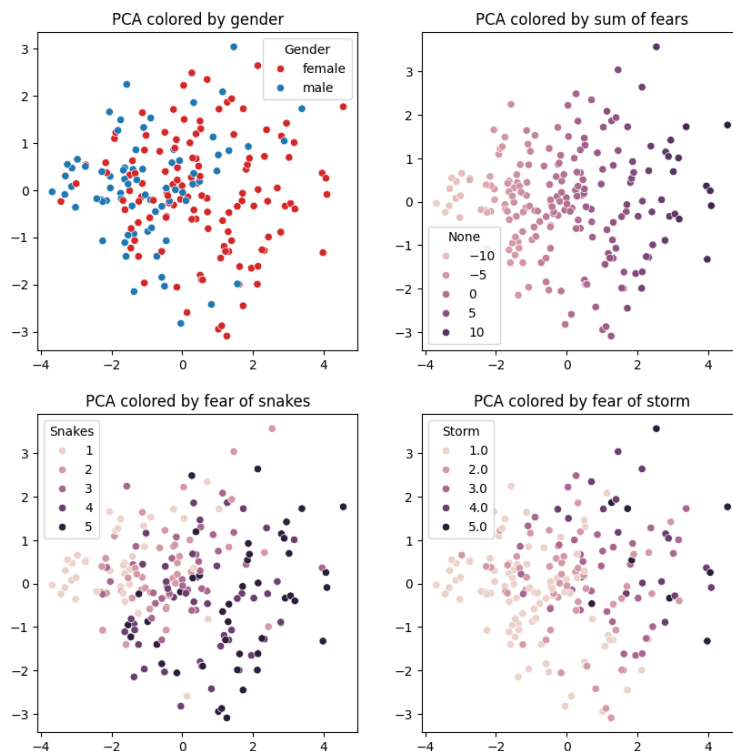

1.7 Conclusion and other courses

We briefly covered several statistical concepts often used in visualization:

- histogram,
- kernel density estimation,
- empirical cumulative distribution function,
- clustering,
- dimensionality reduction.

You will learn more in the next years of your study:

- [Fundamentals of Probability and Statistics](#), 2W (DAV) or 3W (BIN)
- [Principles of Data Science](#) 3W (DAV)
- [Linear Algebra](#) this semester